



Integrated supplier of equipment for high end laundry

JIANGSU CHUANDAO WASHING MACHINERY TECHNOLOGY CO.,LTD.

ADD: NO.388 XINGGANG ROAD, CHONGCHUAN DISTRICT,NANTONG CITY, 226000,CHINA.
TEL: 0086(0)513-8566 3388
FAX: 0086(0)513-8566 3300

SHANGHAI CHUANDAO AIMEI MACHINERY EQUIPMENT CO.,LTD.

ADD: NO.516 TENGFU ROAD,BAIHE TOWN,QINGPU DISTRICT,201799,SHANGHAI,CHINA.
TEL: 0086(0)21-3982 1778
FAX: 0086(0)21-3982 1005

KUNSHAN CHUANDAO WASHING MACHINERY CO.,LTD.

ADD: NO.18 XIANGYUN ROAD,DIANSHANHU TOWN,KUNSHAN CITY,215300,CHINA.
DISTRICT,201799,SHANGHAI,CHINA.
TEL: 0086(0)512-8366 3388
FAX: 0086(0)512-8366 3300

Technical Parameters

MODEL	SHS-2100 (100kg)	SHS-2060 (60kg)	SHS-2040 (40kg)	STANDARD	SHS-2100 (100kg)	SHS-2060 (60kg)	SHS-2040 (40kg)
Voltage (V)	380	380	380	Steam Pipe (mm)	DN25	DN25	DN25
Capacity (kg)	100	60	40	Water Inlet Pipe (mm)	DN50	DN40	DN40
Volume (L)	1000	600	400	Hot Water Pipe(mm)	DN50	DN40	DN40
Max Speed (rpm)	745	815	935	Drain Pipe(mm)	DN110	DN110	DN110
Power (kw)	15	7.5	5.5	Drum Diameter(mm)	1310	1080	900
Steam Pressure (MPa)	0.4 ~ 0.6	0.4 ~ 0.6	0.4 ~ 0.6	Drum Depth(mm)	750	680	660
Water Inlet Pressure(MPa)	0.2 ~ 0.4	0.2 ~ 0.4	0.2 ~ 0.4	Weight(kg)	3260	2600	2200
Noise (db)	≤ 70	≤ 70	≤ 70	DimensionL×W×H(mm)	1815×2090 ×2390	1702×1538 ×2025	1650×1360 ×1780
G Factor (G)	400	400	400				



Make the best washer extractor



40、60、100 KG

INDUSTRIAL WASHER EXTRACTOR

KINGSTAR SERIES WASHER EXTRACTOR >




JIANGSU CHUANDAO WASHING MACHINERY TECHNOLOGY CO.,LTD.




PRODUCT FEATURES

PRODUCT FEATURES

- 01** Kingstar automatic washer extractor control system can realize main programs such as automatic water addition, pre-wash, main wash, rinsing, neutralization, etc. There are 30 sets of washing programs to choose from, and 5 sets of common automatic washing programs are available.
- 02** Kingstar automatic washer extractor backward tilted at 3.5 degrees of the outer drum. In addition to rotation and stirring of the linen from left and right direction, it can also be washed from front to back direction, which not only increase the cleanliness of linen and also effectively avoid squeezing the linen at the door, causing damage to the linen in the gap.
- 03** Kingstar automatic washer extractor equipped with the "intelligent weighing system", according to the actual weight of the linen, add water and detergent according to the proportion, and the corresponding steam can save the cost of water, electricity, steam and detergent, but also ensure the stability of washing quality.
- 04** Kingstar automatic washer extractor rippl diameter of the main axis reaches 160mm, imported rolling bearings and oil seals, which can ensure that it does not need to replace the bearing oil seal for 5 years.
- 05** The strength design of the Kingstar automatic washer extractor, the design of the transmission system, and the configuration of the high-quality inverter all revolved around the super extraction capacity of 400G. The drying time was shortened, while the daily output was increased, the consumption of drying steam was reduced, and the cost of steam consumption was greatly saved.
- 06** Kingstar automatic washer extractor belt pulley is made of the high-grade aluminum alloy material and is a whole integrated die-casting structure, which effectively guarantees the assembly accuracy of the main axis. It has good anti-rust, anticorrosive, and anti-knock effects, and durable.
- 07** Kingstar automatic washer extractor large size stainless steel loading door design, saving time and effort to load clothing, electronic door locks are controlled by computer program, and the door only can be opened after high speed extraction, which can effectively avoid personal safety accidents.
- 08** The machine adopts the design of 3-color indicator lights, which can warn the operator during operation, normal, finish washing, and fault warning.
- 09** Electric components are imported brands. The inverter is Mitsubishi brand in Japan and all contactors are Schneider from France, all wires, plugins, bearing, etc. are imported brands.
- 10** The design of large-diameter water inlet, automatic feeding system and optional double drainage can help you shorten the washing time, improve the efficiency and reduce the cost.

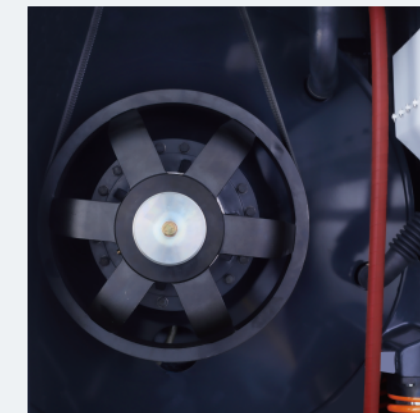

▶ Kingstar Washer Extractor Inner Drum.

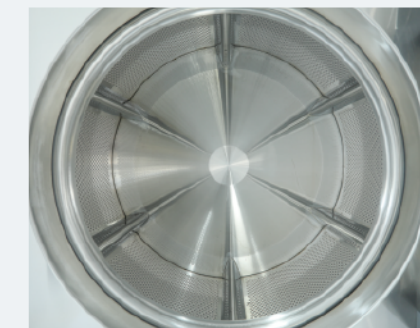

The inner and outer drums of the machine and the parts in contact with water are all made of SUS304 stainless steel to ensure that the washing machine will never rust, and there will be no washing quality accidents caused by the rusting of the washing machine.

The linen feeding port of this machine is processed by a special machine. The mouth surface at the junction of the inner drum and the outer drum is all designed with a crimping mouth with 270 degrees, surface is smooth, strength is high and the gap is small, so as to avoid the damage of linen.

▶ Kingstar Industrial Automatic Washer Extractor shock mitigation system.



The machine adopts down suspended shock absorption design, inner and outer double-layer seat springs+rubber shock absorption springs and machine feet rubber shock absorption and four damping shock absorption structure design, ultra-low vibration, shock absorption rate can reach 98%, Without ground base, can be used on any floor.

▶ Kingstar Industrial Automatic Washer Extractor Add Detergents



20 Years

Design by 20 years of service life



3 Years

3 Years Warranty.